


TrueNet® C6T 4 Pair Outdoor Cable

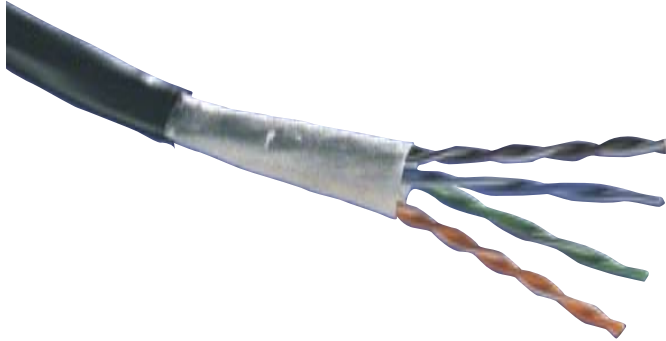

The Outback cable is a 4-pair, 23 gauge Category 6 data cable designed for outdoor use. The cable combines excellent transmission performance and weather resistant properties. It is intended for outdoor installation, in buried conduit or as aerial cable. The core contains a water blocking tape which isolates the core from moisture.

Features

- Patented AirES® conductor insulation technology enables improved signal strength and speed with superior electrical performance
- Manufactured with lead free materials
- Moisture barrier core wrap protects pairs

SPEC SHEET



www.adc.com • +1-952-938-8080 • 1-800-366-3891



TrueNet® C6T 4 Pair Outdoor Cable

Specifications

Construction

Conductor: 23 AWG solid bare copper
Insulation: Polyolefin
Filler: Polyolefin Star
Core Tape: Moisture barrier core wrap
Jacket: Linear Low Density Polyethylene, Black 0.260" (6.6mm) nominal O.D.

Compliances: ETL Verified TIA/EIA-568-B.2-1 Category 6 Horizontal
 ISO/IEC 11801 Category 6 Horizontal Cable Requirements

Common Applications:

4/16 Mb/s Token Ring (IEEE 802.5)	100VG-Any LAN (IEEE 802.12)
10BASE-T (IEEE 802.3)	52/155 Mb/s ATM (ATM Forum)
100 Mb/s TP-PMD	622 Mb/s ATM (ATM Forum)
Broadband & Baseband Video	1000BASE-T (Gigabit Ethernet)
100BASE-T ("Fast Ethernet")	1 Gigabit Networking System (WGNA)
100BASE-T4 ("Fast Ethernet")	1.2 Gb/s ATM (ATM Forum)
100BASE-TX ("Fast Ethernet")	77 Channel Broadband Video

Thermal Characteristics:

Transport and Storage: -20°C to 75°C
Installation: 4°C to 50°C
Operation: -20°C to 75°C

Mechanical Characteristics:

Bend Radius:
During Installation: 8 X O.D.
Installed: 4 X O.D.
Pull Tension: 25# (110N)

Electrical Characteristics:

Conductor DC Resistance @ 20°C (Max): 28.6 Ω/1000 ft (9.38 Ω/100 m)
 DC Resistance Unbalance (Max): 2%
 Mutual Capacitance @ 20°C (Max): 17 pF/ft (5.6nF/100 m)
 Operating Voltage (Max): 300 VDC
 Worst Case Cable Skew: 45 ns/100 m
 Nominal Velocity of Propagation: 66%

Ordering Information

Description	Weight		Catalog Number
	LBS/KFT	KG/KM	
Reel – 1000 ¹	29	42.5	TN6TOP-BK02

11/06 • 103762AE TrueNet® C6T 4 Pair Outdoor Cable



TrueNet® C6T 4 Pair Outdoor Cable

Specification

11/06 • 103762AE TrueNet® C6T 4 Pair Outdoor Cable

FREQ MHZ	FITTED IMPEDANCE Ohms	INSERTION LOSS dB/100m		RETURN LOSS dB/100m		PAIR-PAIR NEXT dB/100m		PSNEXT dB/100m	
		Max	Spec	Min	Spec	Min	Spec	Min	Spec
	Spec								
1	100 +/-3	1.7	2.0	26.2	20.0	83.9	74.3	80.8	72.3
4	100 +/-3	3.4	3.8	33.8	22.9	80.0	65.3	76.4	63.3
8	100 +/-3	4.8	5.3	34.5	24.5	74.0	60.8	72.3	58.8
10	100 +/-3	5.4	6.0	37.2	25.0	68.6	59.3	67.5	57.3
16	100 +/-3	6.8	7.6	33.5	25.0	71.0	56.2	68.8	54.2
20	100 +/-3	7.6	8.5	34.8	25.0	62.7	54.8	62.2	52.8
25	100 +/-3	8.6	9.5	36.1	24.3	59.1	53.3	58.6	51.3
31.25	100 +/-3	9.6	10.7	38.8	23.6	67.2	51.9	64.7	49.9
62.5	100 +/-3	13.6	15.4	35.2	21.5	56.8	47.4	54.1	45.4
100	100 +/-3	17.3	19.8	35.0	20.1	53.7	44.3	52.1	42.3
155	100 +/-3	21.7	25.2	32.8	18.8	53.6	41.4	51.9	39.4
200	100 +/-3	24.8	29.0	32.9	18.0	47.3	39.8	45.7	37.8
250	100 +/-3	27.8	32.8	31.3	17.3	49.1	38.3	47.2	36.3
300	100 +/-3	30.6		31.3		49.4		46.5	
350	100 +/-3	33.1		30.0		49.1		46.7	
400	100 +/-3	35.5		26.6		41.3		40.6	
550	100 +/-3	42.1		22.3		42.1		40.4	

FREQ MHZ	PAIR-PAIR ACR dB/100m		PSACR dB/100m		PAIR-PAIR ELFEXT dB/100m		PSELFEXT dB/100m		LCL dB/100m
	Min	Spec	Min	Spec	Min	Spec	Min	Spec	Min
1	82.3	72.3	79.2	70.3	79.4	67.8	75.1	64.8	40.0
4	76.6	61.5	73.1	59.5	67.7	55.8	63.3	52.8	40.0
8	69.4	55.4	67.5	53.4	61.6	49.7	57.3	46.7	40.0
10	63.4	53.3	62.2	51.3	59.4	47.8	55.2	44.8	40.0
16	64.2	48.7	62.0	46.7	54.8	43.7	51.3	40.7	38.0
20	55.3	46.3	54.7	44.3	52.5	41.8	49.6	38.8	37.0
25	50.8	43.8	50.1	41.8	49.6	39.8	47.4	36.8	36.0
31.25	57.8	41.2	55.4	39.2	47.6	37.9	45.6	34.9	35.1
62.5	43.4	32.0	40.8	30.0	42.4	31.9	39.7	28.9	32.0
100	36.9	24.5	35.3	22.5	38.3	27.8	35.5	24.8	30.0
155	32.1	16.3	30.4	14.3	37.6	24.0	34.7	21.0	28.1
200	23.0	10.8	21.0	8.8	35.1	21.8	33.3	18.8	27.0
250	21.9	5.5	20.0	3.5	27.5	19.8	26.8	16.8	26.0
300	19.8	-	16.8	-	25.3	-	23.9	-	
350	16.3	-	14.0	-	27.3	-	25.0	-	
400	6.2	-	5.5	-	29.4	-	27.6	-	
550	1.0	-	-	-	23.9	-	23.7	-	

NOTE: The above listed discrete frequency electrical performance values are provided for engineering information only. Actual compliance testing is based on swept frequency measurements. The spec values are based on TIA/EIA-568-B.2-1 specification.

SPEC SHEET



Web Site: www.adc.com

From North America, Call Toll Free: 1-800-366-3891 • Outside of North America: +1-952-938-8080

Fax: +1-952-917-3237 • For a listing of ADC's global sales office locations, please refer to our Web site.

ADC Telecommunications, Inc., P.O. Box 1101, Minneapolis, Minnesota USA 55440-1101

Specifications published here are current as of the date of publication of this document. Because we are continuously improving our products, ADC reserves the right to change specifications without prior notice. At any time, you may verify product specifications by contacting our headquarters office in Minneapolis. ADC Telecommunications, Inc. views its patent portfolio as an important corporate asset and vigorously enforces its patents. Products or features contained herein may be covered by one or more U.S. or foreign patents. An Equal Opportunity Employer

103762AE 11/06 Original © 2006 ADC Telecommunications, Inc. All Rights Reserved