



Copper Connectivity Solutions – Category 6 Termination Blocks




HighBand® 25 Termination Blocks



Complete 300-pair HighBand® 25 system includes back mount frame and HighBand 25 blocks with rear cable managers, patch cords, cable management rings and covers (single on left side, dual on right side) and a cable trough added below



HighBand® 25 back mount frame

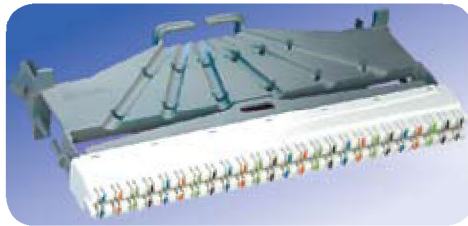

HighBand® 25 block rear cable manager



HighBand® 25 label holder (shown mounted on block)

Features and Benefits

- UL certified
- 25-pair blocks for voice and data applications (first 24 pair for data)
- Performance exceeds TIA/EIA Category 6 requirements
- A test port provides “look-both-ways” testing capability without the removal of any wires; also allows simple circuit monitoring through use of a test cord
- Features disconnect contacts providing unique patch-by-exception functionality and improved administration
- Available as individual components or in complete systems, consisting of unique wire termination blocks, cable managers, patch cords, mounting frames, label holders and covers

Ordering information follows on the next page

Tech Tip

When installing HighBand® 25 blocks, it is easier to begin wire termination at the bottom and work up the mounting hardware.



Copper Connectivity Solutions – Category 6

Termination Blocks

HighBand® 25 Termination Blocks

Ordering Information

Description	Dimensions (HxWxD)	Catalog Number
HighBand® 25 25-pair block systems		
300-pair basic system Consists of (1) back mount frame, (12) 25-pair HighBand 25 blocks and (12) label holders. Patch cords, optional cable troughs, cable management rings, covers ordered separately	20.75" x 7.88" x 8.5" (528mm x 200mm x 215.9mm)	6450 1 101-00
900-pair basic system Consists of (3) back mount frames, (36) 25-pair HighBand 25 blocks, (36) label holders. Patch cords, optional cable troughs, cable management rings, covers ordered separately	62.25" x 7.88" x 8.5" (1581.2mm x 200mm x 215.9mm)	6450 1 102-00
300-pair cable management kit Includes (2) dual cable management rings and (1) dual cover	20.6" x 8.62" x 8.6" (523mm x 219mm x 218.5mm)	6450 1 103-00
900-pair cable management kit Includes (6) dual cable management rings and (3) dual covers	61.8" x 8.62" x 8.6" (1569.7mm x 219mm x 218.5mm)	6450 1 104-00
HighBand 25 block with rear cable manager Color-coded; terminates (6) 4-pair Category 6 cables. Rear cable manager simplifies installation; incoming cables routed through slots and held securely by built-in clips <i>Quantity: 12</i>	1.7" x 8.5" x 4.5" (43.2mm x 215.9mm x 114.3mm)	6468 5 600-00
HighBand 25 25-pair voice module with rear cable manager <i>Quantity: 12</i>	1.7" x 8.5" x 4.5" (43.2mm x 215.9mm x 114.3mm)	6468 5 300-00

Ordering information continues on the next page



Copper Connectivity Solutions – Category 6

Termination Blocks

HighBand® 25 Termination Blocks

Ordering Information

Description	Dimensions (HxWxD)	Catalog Number
HighBand® 25 label holder Clips into position in three locations, providing secure fit without disrupting patching <i>Quantity: 12</i>	0.47" x 8.5" x 0.3" (11.9mm x 215.9mm x 7.6mm)	6462 2 408-00
HighBand® 25 back mount frame High-grade stainless steel; extra deep frame supports strict Category 6 bend radius requirements; Velcro tie points allow neat installation and ease of cable routing <i>Quantity: 1</i>	20.8" x 7.87" x 4.38" (529mm x 200mm x 111.3mm)	6450 2 155-00
HighBand® 25 cable trough Mounts on top or bottom of each back mount frame; provides superior patch cord management <i>Quantity: 1</i>	5.9" x 7.87" x 8.6" (150mm x 200mm x 218.5mm)	6450 2 157-00
HighBand® 25 cable management rings <i>Quantity: 2</i>		
Single: Use when space is limited or additional cable manager required	2.5" x 8.5" x 8.25" (63.5mm x 140.3mm x 209.6mm)	6450 2 156-01
Dual: Position between 2 frames	2.5" x 5.5" x 8.25" (63.5mm x 215.9mm x 209.6mm)	6450 2 158-02
HighBand® 25 19" (482.6mm) rack mount frame <i>Quantity: 1</i>		
2RU—100-pair		6450 1 176-00
3RU—200-pair		6450 1 177-00
4RU—300-pair		6450 1 178-00